



Gate Repair Services

0114633025 0834522015

www.gates.co.za

NiceHansa Walky

Solemyo Opera Blue BUS 24V



For swing gates with leaves up to 1.8 m with articulated arm. Equipped with Nice BlueBUS technology, compatible for operation with Nice Solemyo and Opera systems.

Irreversible electromechanical gear motor at 24 Vdc.

Ultra compact: ideal for pedestrian gates, recommended for small posts (width 8 cm).

Safe: thanks to the irreversible motor and anti-shear arm with built-in mechanical stop on closure (with installation of entire arm).

Practical: the articulated arm enables installation in specific conditions, such as in the presence of small walls or obstacles adjacent to the post.

Quick: no waiting in front of the gate, just 7 seconds to open or close (in optimal installation conditions, with reduced arm and 90° opening).

Convenient: incorporable flashing Led indicator, with courtesy light function (WLT, optional); rapid motor release for manual movement of the gate.

Control unit:

- simple programming;
- self-learning of opening and closing limit positions;
- automatic fault diagnostics;
- programming of pause time;
- pedestrian pass door;
- deceleration on opening and closing;
- provision for connection of latest generation resistive sensitive edges.

No black out: operation in the event of a power failure by means of optional batteries (PS424) housed inside the motor.

Solemyo system



The solar power kit Solemyo to automate gates, garage doors or barrier gates, including those located far from the power mains and without the need for costly and invasive excavation work.

Opera system





The innovative Opera system enables the installer to manage, program and control automation systems, also remotely, simply and safely, with significant savings in time.

Technical specifications

Code	WL1024
Electrical data	
Power supply (Vac 50/60 Hz)	230
Power supply (Vdc)	-
Absorption (A)	0.8
Power (W)	120
Performance data	
Speed (m/s)	1.7 - 2.5
Torque (Nm)	100
Work cycle (cycles/hour)	50
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	90x125x385 h
Weight (kg)	4.8

Utilisation limits

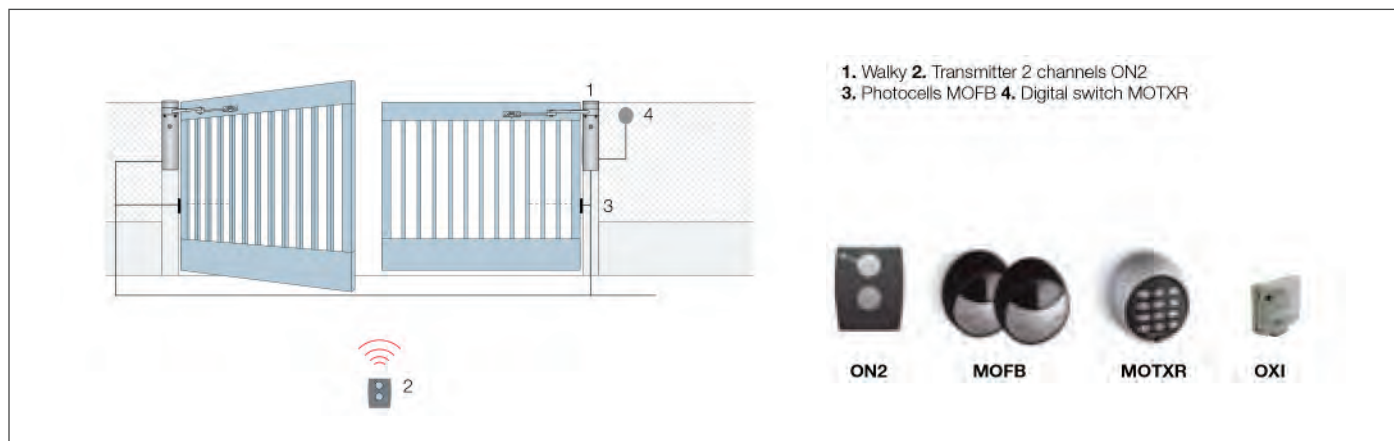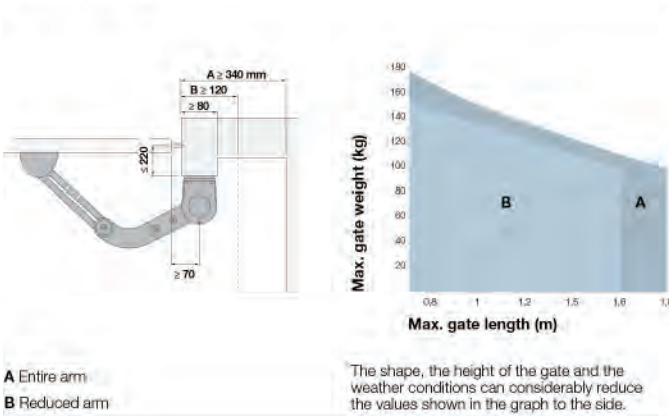

For Gate Motor and Intercom Repairs, or Quotes on New Installations
Call the National Call Centre 011 463 3025 today
24 hour emergency 083 452 2015
repairs@gates.co.za / www.gates.co.za