



Gate Repair Services

0114633025 0834522015

www.gates.co.za

NiceHansa Elite 24 V



For swing gates with leaves up to 3 m long and 600 kg weight and up to 5 m long and 350 kg weight. Underground installation.

Manufactured in South Africa, the Elite offers a tough bronze gear for durability, a steel casing for strength and a 24 Vdc battery back-up system to ensure continued operation during power outages.

The power-pack (optional) enables the Elite to sustain **intensive operation** and is suitable to automate high-traffic access points.

The Elite's intelligent controller makes it **easily programmable** with simplified setup procedures and easy trouble shooting.

Motor features:



- soft start/soft stop facility;
- LED array and display for indication of gate motor status and for easy trouble shooting and fault finding;
- general purpose relay (potential free) conveniently allows clients to switch any auxiliary device;
- the A.S.A.P. mode ensures fast gate auto-closure;
- obstruction detection increases safety whilst the gate is operational;
- battery back-up;
- loop detector facility;
- optional plug-in receiver;
- lip function.

Technical specifications

Code	ELITESTD	ELITEHD	ELITEHDPP
Electrical data			
Power Supply (Vdc)		24	
Absorption (A)		6	
Power (W)		150	
Performance data			
Speed open 90° (s)*	13		16
Torque (Nm)	140		160
Work cycle (cycles/day)		200	720
Operations in standby with battery		30	
Dimensional and general data			
Protection level (IP)		44	
Working temp. (°C Min/Max)		-20 ÷ +50	
Dimensions (mm)		410x410x560 h	
Weight (kg)		50	

* In perfect installation conditions

Utilisation limits

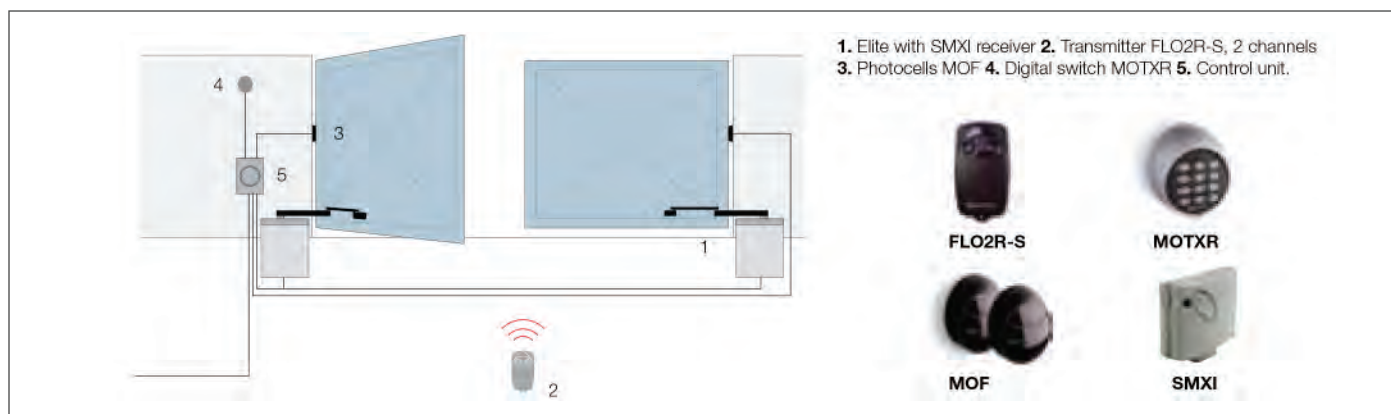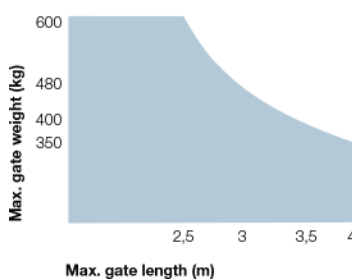

Spare control board

Power-Pack

For Gate Motor and Intercom Repairs, or Quotes on New Installations

Call the **National Call Centre** 011 463 3025 today

24 hour emergency 083 452 2015

repairs@gates.co.za / www.gates.co.za