



# Gate Repair Services

0114633025 0834522015

www.gates.co.za

NiceHansa Wingo

Solemyo Opera Blue BUS 24V



For swing gates with leaves up to 1 m long and 500 kg weight or 3.5 m long and 200 kg weight, surface mounted.

Compatible for operation with Nice Solemyo and Opera systems.

Patented layout of the internal components: fewer moving parts means greater reliability and quiet operation.

**Easy to install:** after the 24 Vdc gear motor has been assembled, all electrical connections are made from above.

**User-friendly release** with personalised Nice key or standard lock (optional).

**Pre-assembled,** travel stops PLA13 for closing and opening manoeuvres.

Control unit Nice Moonclever **MC824H**, equipped with BlueBUS technology and provision for operation with Solemyo system:

- simple programming, by means of a single key;
- self-learning of opening and closing limit positions;
- automatic fault diagnostics;
- programming of pause time;
- pedestrian pass door;
- deceleration on opening and closing;
- obstacle detection with dual technology;
- operation in event of power failure by means of rechargeable batteries (PS324);
- provision for connection of latest generation resistive sensitive edges.

### Solemyo system



The solar power kit Solemyo to automate gates, garage doors or barrier gates, including those located far from the power mains and without the need for costly and invasive excavation work.

### Opera system





The innovative Opera system enables the installer to manage, program and control automation systems, also remotely, simply and safely, with significant savings in time.

### Technical specifications

Code	WINGO
<b>Electrical data</b>	
Power supply (Vdc)	24
Absorption (A)	10
Power (W)	240
<b>Performance data</b>	
Speed open 90° (s)*	10
Force (N)	1500
Work cycle (cycles/day)	180
Operations in standby with battery	30
<b>Dimensional and general data</b>	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	920x100x110 h
Weight (kg)	6

\* In perfect installation conditions

### Utilisation limits

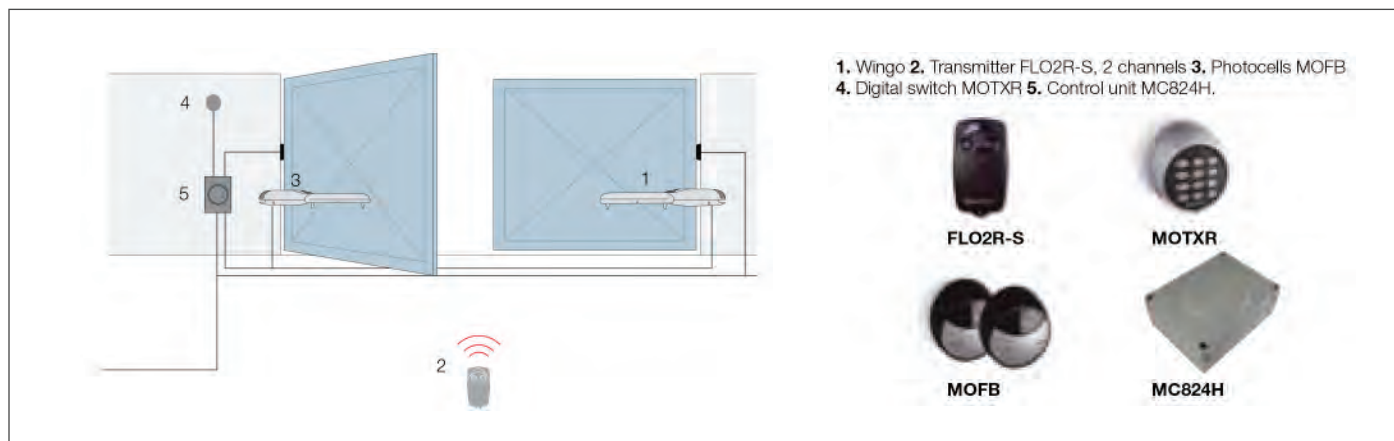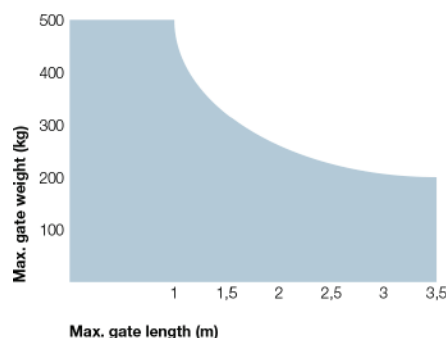

For Gate Motor and Intercom Repairs, or Quotes on New Installations

Call the **National Call Centre** 011 463 3025 today

**24 hour emergency** 083 452 2015

repairs@gates.co.za / www.gates.co.za